

## HIGH-PRESSURE JETTING MACHINE

TO CLEAN AND UNBLOCK SEWERS AND DRAINS QUICKLY AND EFFECTIVELY


PYTHON PRO very functional device with small dimensions, designed for hydrodynamic cleaning of sanitary, rainwater and industrial pipes with a maximum diameter of up to 500 mm (depending on the version). The device has been developed and manufactured by *KanRo Ltd®* based on many years of experience in the sale and service of high-pressure cleaning equipment.



PYTHON PRO high-pressure jetting machine can be mounted on standard 1- and 2-axis transport trailers. In addition, trailers can be equipped with a factory frame with a tarpaulin or a plastic housing. It can also be fitted to commercial van vehicles. Everywhere where big cleaning cars cannot be reached, PYTHON PRO will be perfect. The PYTHON PRO device has been equipped with a reliable high-pressure pump from the renowned European manufacturer UDOR from Italy. The pump with ceramic plungers, thanks to which it is possible to work with the device using hot water. It can be also operated by one person from panel control or also with remote radio control.

### AREAS OF APPLICATION

- ✓ cleaning the sewage network
- ✓ cleaning rainwater drainage
- ✓ cleaning the water supply network
- ✓ cleaning drainage pipes
- ✓ pressure washer
- ✓ watering greenery

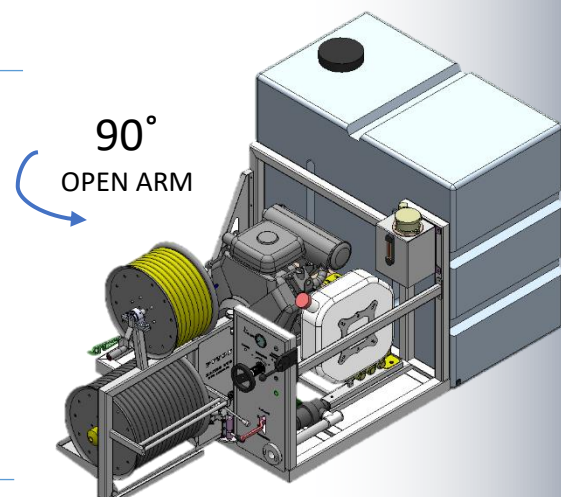

## PYTHON PRO - SPECIFICATION

|                         |                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                 |                                                 |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-------------------------------------------------|
| ENGINE                  | BRIGGS & STRATTON<br>35 HP petrol engine with an electric starter                                                                                                                                                                                                                                                                                                                                                     |                                                 |                                                 |
| PUMP                    | UDOR triplex plunger pump fitted with ceramic plungers;<br>pressure regulator and manometer                                                                                                                                                                                                                                                                                                                           |                                                 |                                                 |
| PUMP EFFICIENCY         | 200 bar working pressure<br>55 l/min. flow rate                                                                                                                                                                                                                                                                                                                                                                       | 150 bar working pressure<br>75 l/min. flow rate | 120 bar working pressure<br>85 l/min. flow rate |
| WATER TANK              | with a capacity of 650 l (white), equipped with an overflow of water                                                                                                                                                                                                                                                                                                                                                  |                                                 |                                                 |
| PANEL CONTROL           | panel control located in the device, safety switch                                                                                                                                                                                                                                                                                                                                                                    |                                                 |                                                 |
| REMOTE RADIO CONTROL    | 7-channel remote radio control: engine start/stop, motor speed plus/minus, pump start/stop, safety switch                                                                                                                                                                                                                                                                                                             |                                                 |                                                 |
| HIGH-PRESSURE HOSE REEL | hose 80 m long, inside diameter of the hose 13 mm NW with coupling ½" ;<br>reel in stainless steel with hydraulic drive with smooth, stepless speed control in both directions and the free-running position with the rotating union and three-way valve, hose reel is equipped with a guide for even placement of the hose; hose reel is located on the arm with horizontal repeal by 90°                            |                                                 |                                                 |
| FILLING HOSE            | manual reel with filling hose length 50 m, NW 19 mm                                                                                                                                                                                                                                                                                                                                                                   |                                                 |                                                 |
| APPLICATION RANGE       | pipes diameter max 500 mm                                                                                                                                                                                                                                                                                                                                                                                             |                                                 |                                                 |
| STANDARD EQUIPMENT      | <ul style="list-style-type: none"> <li>✓ spraygun and lanc 700 mm</li> <li>✓ digital hour meter</li> <li>✓ standard nozzle open</li> <li>✓ standard nozzle blind</li> <li>✓ rinsing nozzle "GRENADE"</li> <li>✓ piercing nozzle "QUATTRO"</li> <li>✓ protection against running dry</li> <li>✓ protection against working without oil</li> <li>✓ winter circulation</li> <li>✓ user manual, CE certificate</li> </ul> |                                                 |                                                 |

