

## HIGH-PRESSURE JETTING MACHINE


### TO CLEAN AND UNBLOCK SEWERS AND DRAINS QUICKLY AND EFFECTIVELY

ANACONDA very functional device with small dimensions, designed for hydrodynamic cleaning of sanitary, rainwater and industrial pipes with a maximum diameter of up to 500 mm (depending on the version). The device has been developed and manufactured by *KanRo Ltd®* based on many years of experience in the sale and service of high-pressure cleaning equipment.



The ANACONDA high-pressure jetting machine is designed for installation in a Mercedes-Benz Vito, Toyota ProAce and other VANS. It can also be mounted on standard 1- and 2-axis transport trailers. Everywhere where big cleaning cars cannot be reached, ANACONDA will be perfect.

The ANACONDA device has been equipped with a reliable high-pressure pump from the renowned European manufacturer UDOR. The pump with ceramic plungers, thanks to which it is possible to work with the device using hot water. For ease of use, the operating reel is rotatable and placed on a swivel arm. It can be also operated by one person from panel control or also with remote radio control. Areas of application: cleaning the sewage network, cleaning rainwater drainage, cleaning the water supply network, cleaning drainage pipes, pressure washer.

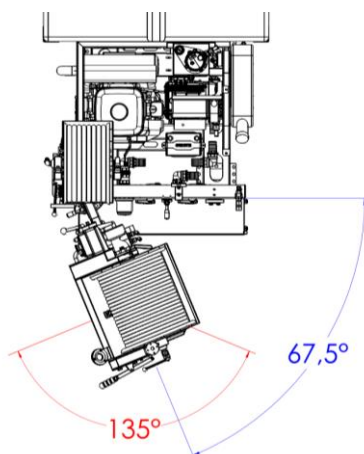



## ANACONDA - HIGH-PRESSURE JETTING MACHINES

### ANACONDA - SPECIFICATION

ENGINE	BRIGGS & STRATTON 37 HP petrol engine with an electric starter		
PUMP	UDOR triplex plunger pump fitted with ceramic plungers; pressure regulator and manometer		
PUMP EFFICIENCY	150 bar 75 l/min.	200 bar 60 l/min.	150 bar 85 l/min.
WATER TANK	with a capacity of 650 l (white), equipped with an overflow of water		
PANEL CONTROL	panel control located in the device, safety switch		
REMOTE RADIO CONTROL <i>*optional</i>	7-channel remote radio control: <ul style="list-style-type: none"> <li>➤ engine start/stop,</li> <li>➤ motor speed plus/minus,</li> <li>➤ pump start/stop,</li> <li>➤ safety switch</li> </ul>		
	<ul style="list-style-type: none"> <li>➤ winding/unwinding hose reel (9-channel remote)</li> </ul>		
HYDRAULIC HIGH-PRESSURE HOSE REEL	hose 80 m long, inside diameter NW 13 mm with coupling ½", reel in stainless steel with hydraulic drive with smooth, stepless speed control in both directions and the free-running position with the rotating union and three-way valve, hose reel is equipped with a (automatic*) guide for even placement of the hose; hose reel is located on the arm with horizontal repeal by 67,5° with the possibility of additional pivoting of 135° in horizontal		
FILLING HOSE	manual reel with filling hose length 50 m, NW 19 mm		
APPLICATION RANGE	pipes diameter max 500 mm		
STANDARD EQUIPMENT	<ul style="list-style-type: none"> <li>➤ spraygun and lanc 700 mm</li> <li>➤ digital hour meter</li> <li>➤ Nozzles Box :               <ul style="list-style-type: none"> <li>✓ standard nozzle open, standard nozzle blind, rinsing nozzle "GRENADE", piercing nozzle "QUATTRO", WD-40</li> </ul> </li> <li>➤ protection against running dry</li> <li>➤ protection against working without oil</li> <li>➤ winter circulation</li> </ul>		

