

## HIGH-PRESSURE JETTING MACHINE

## TO CLEAN AND UNBLOCK SEWERS AND DRAINS QUICKLY AND EFFECTIVELY

PYTHON very functional device with small dimensions, designed for hydrodynamic cleaning of sanitary, rainwater and industrial pipes with a maximum diameter of up to 400 mm (depending on the version). The device has been developed and manufactured by *KanRo Ltd*<sup>®</sup> based on many years of experience in the sale and service of high -pressure cleaning equipment.



PYTHON 2.0 high-pressure jetting machin can be mounted on standard 1- and 2-axis transport trailers. In addition, trailers can be equipped with a factory frame with a tarpaulin or a plastic housing. It can also be fitted to commercial van vehicles. Everywhere where big cleaning cars cannot be reached, PYTHON 2.0 will be perfect. The PYTHON 2.0 device has been equipped with a reliable high-pressure pump from the renowned European manufacturer UDOR from Italy. The pump with ceramic plungers, thanks to which it is possible to work with the device using hot water. It can be also operated by one person from panel control or also with remote radio control.

## AREAS OF APPLICATION

- ✓ cleaning the sewage network
- ✓ cleaning rainwater drainage
- ✓ cleaning the water supply network
- ✓ cleaning drainage pipes
- ✓ pressure washer
- ✓ watering greenery




KanRo Ltd Sp. z o.o. / Fasty, ul. Szosa Knyszynska 89, 15-690 Bialystok, Poland www.kanro.eu / e-mail: export@kanro.eu / +48 602396265 DE, +48 602500588 ENG



## PYTHON 2.0 - HIGH-PRESSURE JETTING MACHINES

<b>PYTHON</b>	2.0	150/	/50 -	SPECIF	<b>ICATION</b>
	2.0	2001	00		

ENGINE	HONDA			
	22 HP petrol engine with an electric starter			
PUMP	UDOR triplex plunger pump fitted with ceramic plungers;			
	pressure regulator and manometer			
PUMP EFFICIENCY	150 bar working pressure,			
	50 l/min. flow rate			
WATER TANK	with a capacity of 500 l			
PANEL CONTROL	panel control located in the device, safety switch			
REMOTE RADIO	7-channel remote radio control: engine start/stop, motor speed			
CONTROL	plus/minus, pump start/stop, safety switch			
HIGH-PRESSURE HOSE	hose 60 m long			
	inside diameter NW 13 mm coupling ½''			
HIGH-PRESSURE HOSE	manual or hydraulic hose reel			
REEL				
FILLING HOSE	manual reel with filling hose length 50 m, NW 19 mm			
APPLICATION RANGE	pipes diameter max 400 mm			
STANDARD EQUIPMENT	✓ spraygun and lanc 700 mm			
	✓ digital hour meter			
	✓ standard nozzle open			
	✓ standard nozzle blind			
	✓ rinsing nozzle "GRENADE"			
	✓ piercing nozzle "QUATTRO"			
	✓ protection against running dry			
	<ul> <li>protection against working without oil</li> </ul>			
	✓ winter circulation			
	✓ user manual, CE certificate			

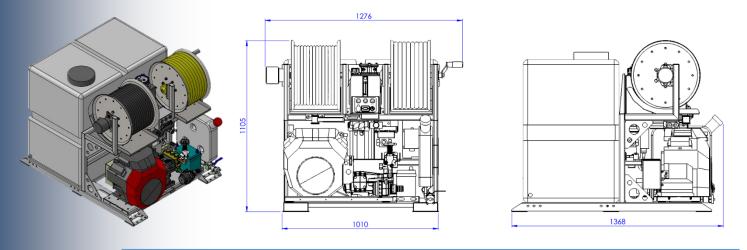



KanRo Ltd Sp. z o.o. / Fasty, ul. Szosa Knyszynska 89, 15-690 Bialystok, Poland www.kanro.eu / e-mail: export@kanro.eu / +48 602396265 DE, +48 602500588 ENG